




- Capacity 5 – 550 l/min
- 2" connections
- Pump body: HDPE, PP, PTFE
- Ceramic air-valve system
- ATEX version up on request
- Max. sizes solid parts in liquid 6 mm
- Viscosity up to 30 000 cP
- Low noise (77 dBa)
- Low air-consumption
- Dry running capability
- Low maintenance and parts costs
- Bolted (SST) leakage free design
- No air leakage at liquid stop



**Each pump tested
Test report included**



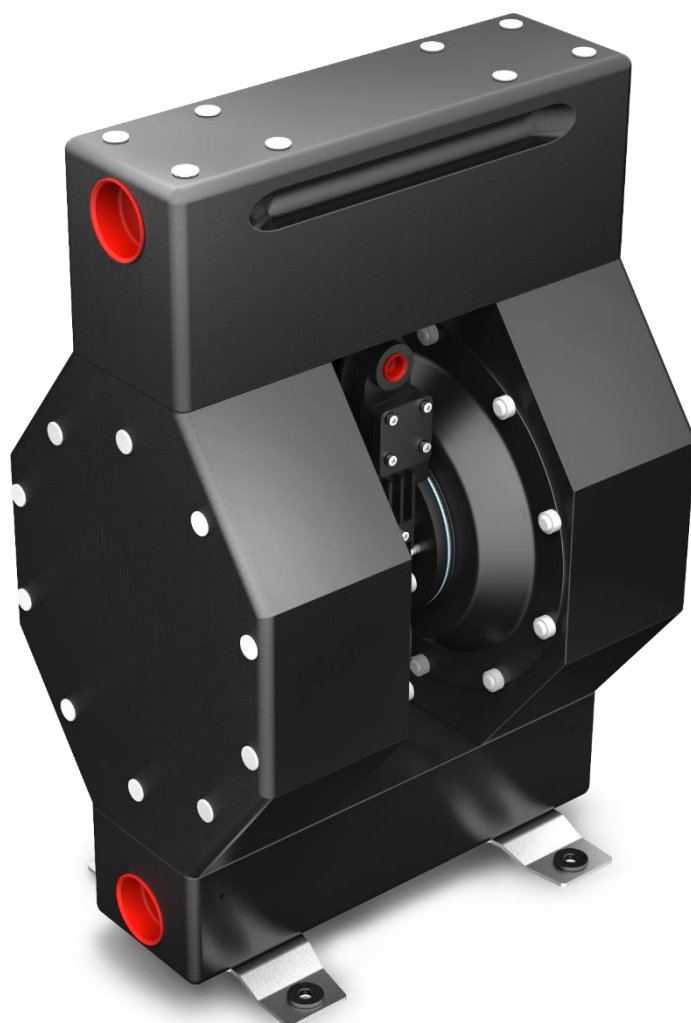


ATEX Version up on request

APPLICATIONS

CHEMICALS • SOLVENTS • PLATING • ACIDS • OILS • INKS • GLUES • ALKALIES • ENAMEL
POLYESTER PAINT • WASTE WATER • COOLING LIQUIDS • FOAMS • HYDRAULIC OILS

Flowchart 2" Series

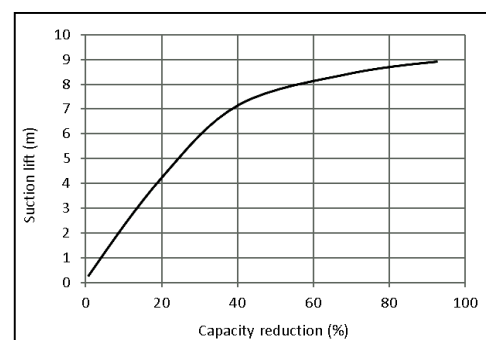
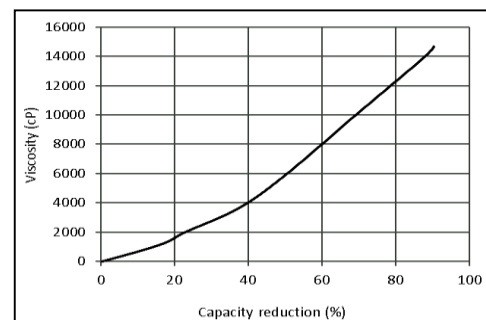
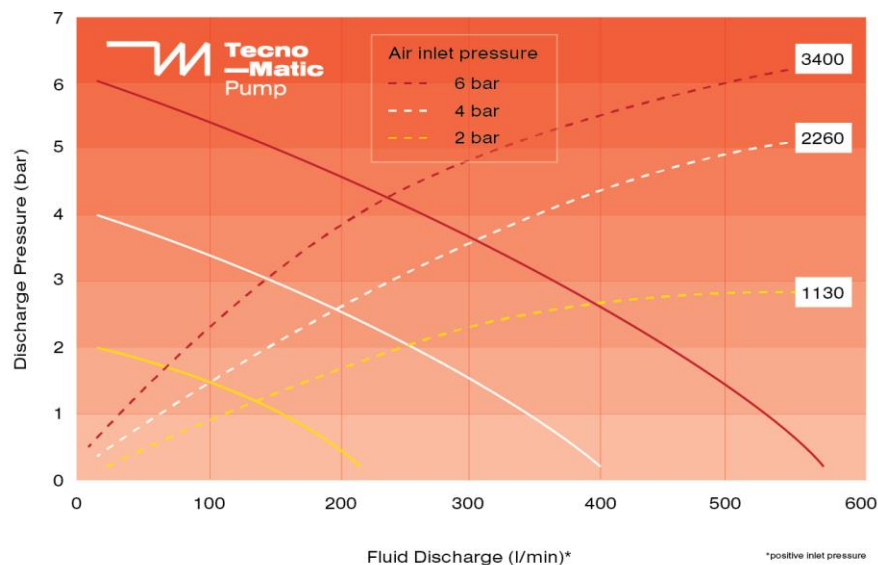


Air Consumption (NL/min)

Available types

Type
TM2-550/2"-HDPE-ST-ST
TM2-550/2"-HDPE-NBR-NBR
TM2-550/2"-HDPE-T-T
TM2-550/2"-P-ST-ST
TM2-550/2"-P-NBR-NBR
TM2-550/2"-P-T-T
TM2-550/2"-PTFE-ST-ST
TM2-550/2"-PTFE-NBR-NBR
TM2-550/2"-PTFE-T-T

Max. weight: 80 Kg

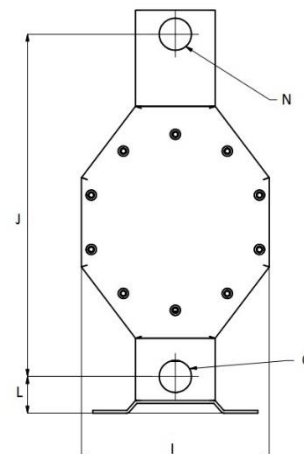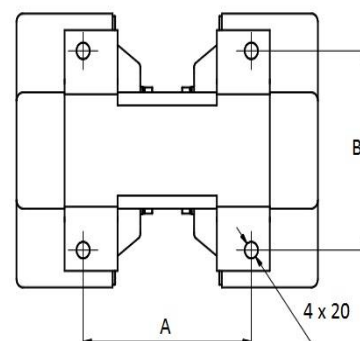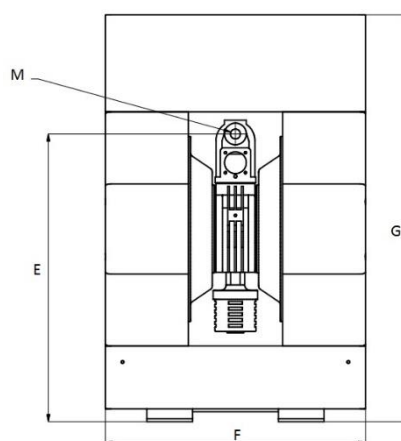

A	254 mm	G	713 mm	M	G1/2
B	240 mm	I	330 mm	N	G2
E	504 mm	J	605 mm	O	G2
F	455 mm	L	65 mm		