

- Capacity 8 – 240 l/min
- 1½" connections
- Max. sizes solid parts in liquid 4 mm
- Viscosity up to 30 000 cP
- Low noise (78 dBa)
- Pump body: Alu. (Komaxit coated)
- Low air-consumption !
- Dry running capability
- Low maintenance and parts costs
- Bolted (SST) leakage free design
- No Air leakage at liquid stop



**Each pump tested  
Test report included**





**Maintenance Free  
Ceramic Air-Valve Parts**


## APPLICATIONS

CHEMICALS • SOLVENTS • PLATING • ACIDS • OILS • INKS • GLUES • ALKALIES • ENAMEL  
POLYESTER PAINT • WASTE WATER • COOLING LIQUIDS • FOAMS • HYDRAULIC OILS

### Flowchart 1 1/2" Series

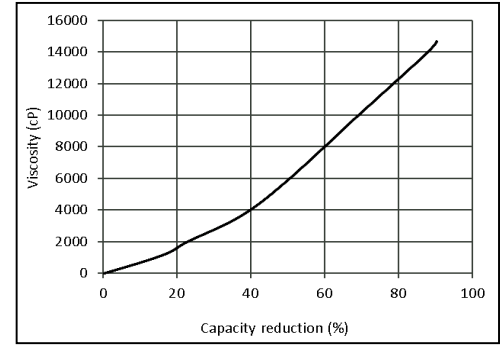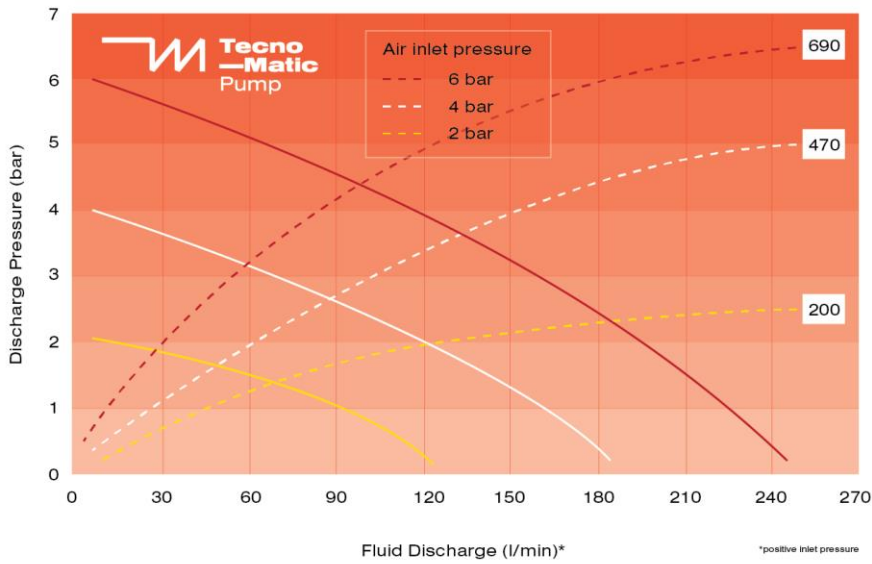


Air Consumption (Nl/min)

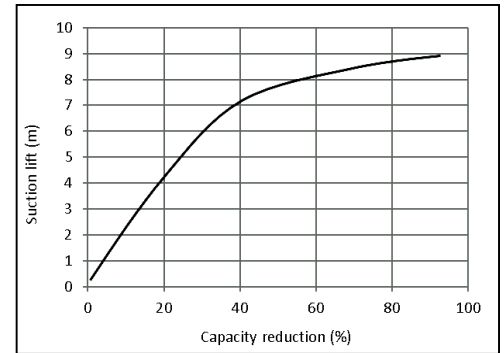

### Available types

Type
TM3-240/1.5"-A-ST-ST
TM3-240/1.5"-A-NBR-NBR
TM3-240/1.5"-A-T-T

Max. weight: 18 Kg

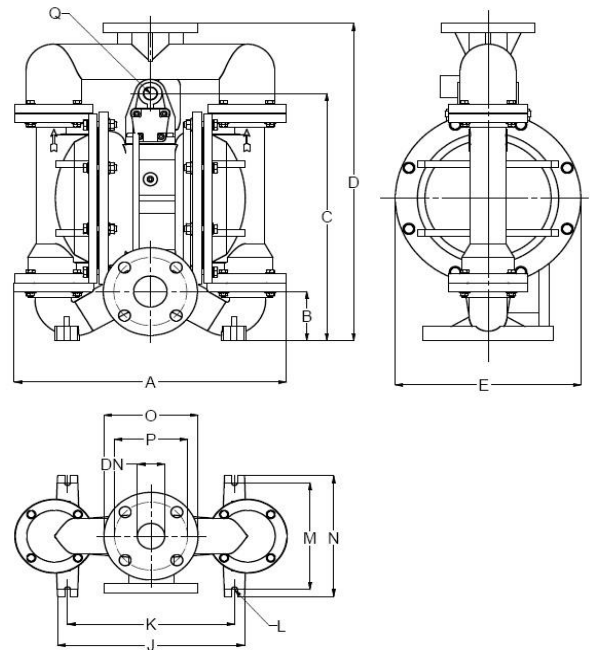

<b>A</b>	367 mm	<b>J</b>	252 mm	<b>O</b>	127 mm
<b>B</b>	71 mm	<b>K</b>	225 mm	<b>P</b>	99 mm
<b>C</b>	358 mm	<b>L</b>	8 mm	<b>DN</b>	45 mm
<b>D</b>	460 mm	<b>M</b>	155 mm		
<b>E</b>	250 mm	<b>N</b>	175 mm		
<b>H</b>	209 mm	<b>Q</b>	3/8" female		